



CATIA 客户端的配置

一.LUM的安装


- 将LUM盘放入光驱中并打开

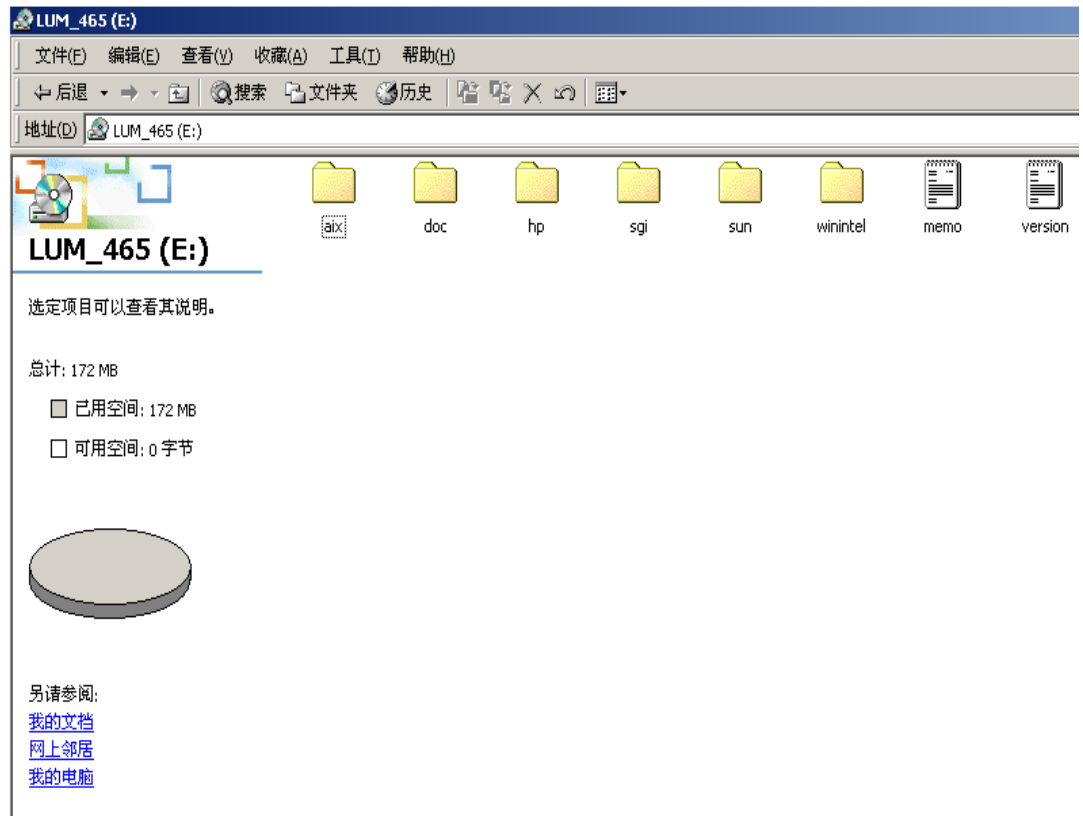


- 打开winintel文件夹，双击安装程序文件arkwin465（可能为高版本的468等）

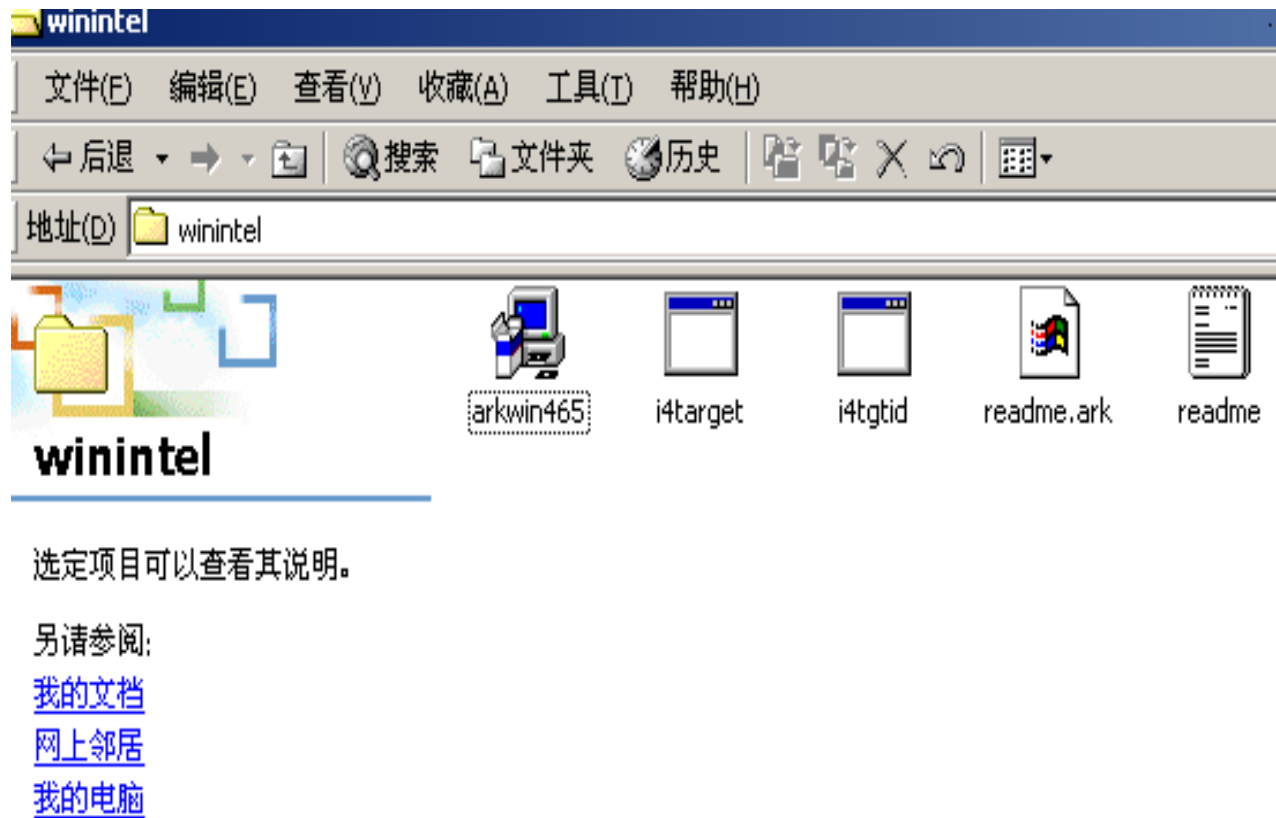


- 双击运行后弹出下列对话框，点击next进行下一步操作

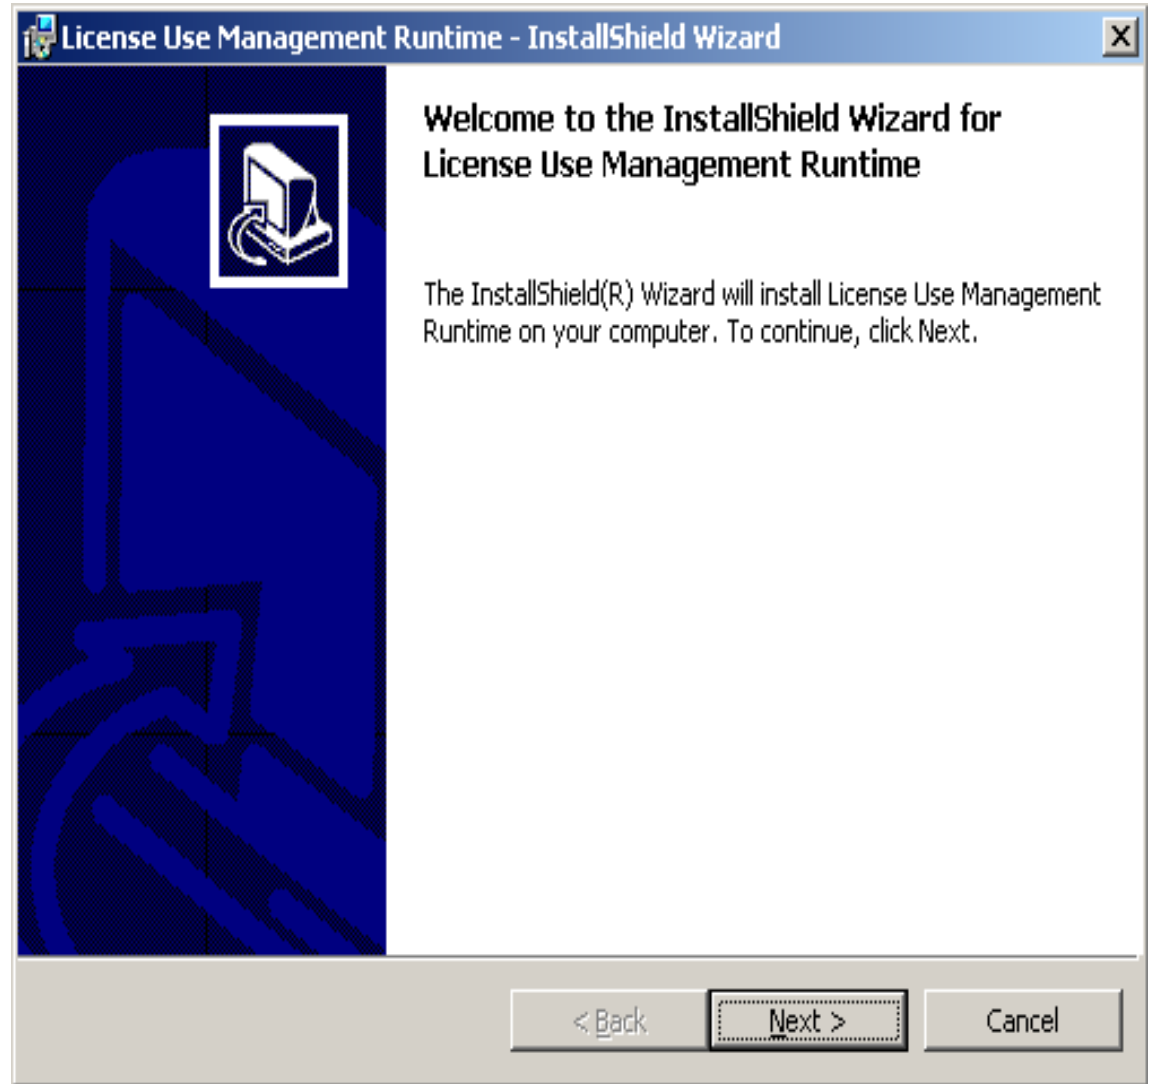

- 选择“我同意”后
方能继续选择
next进行下一步
操作

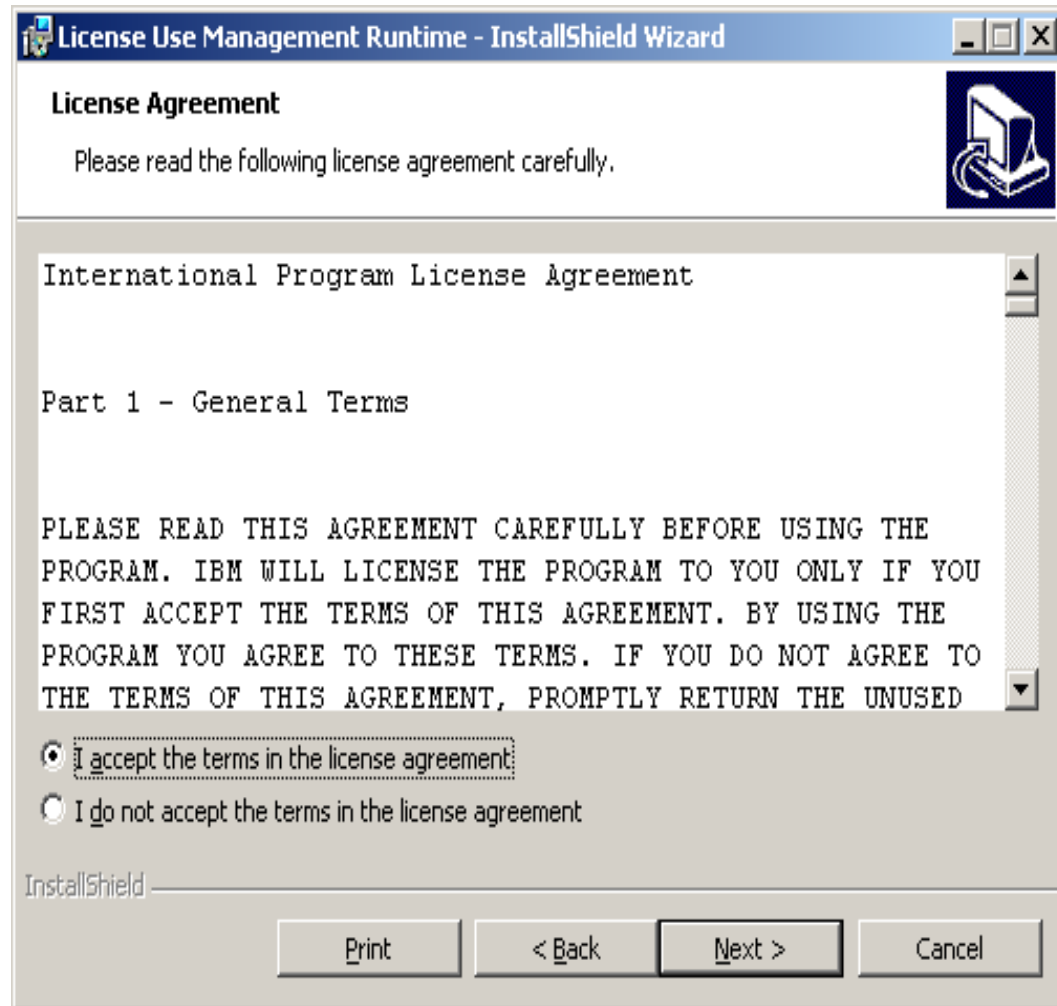

- 选择next
进入下一步操作

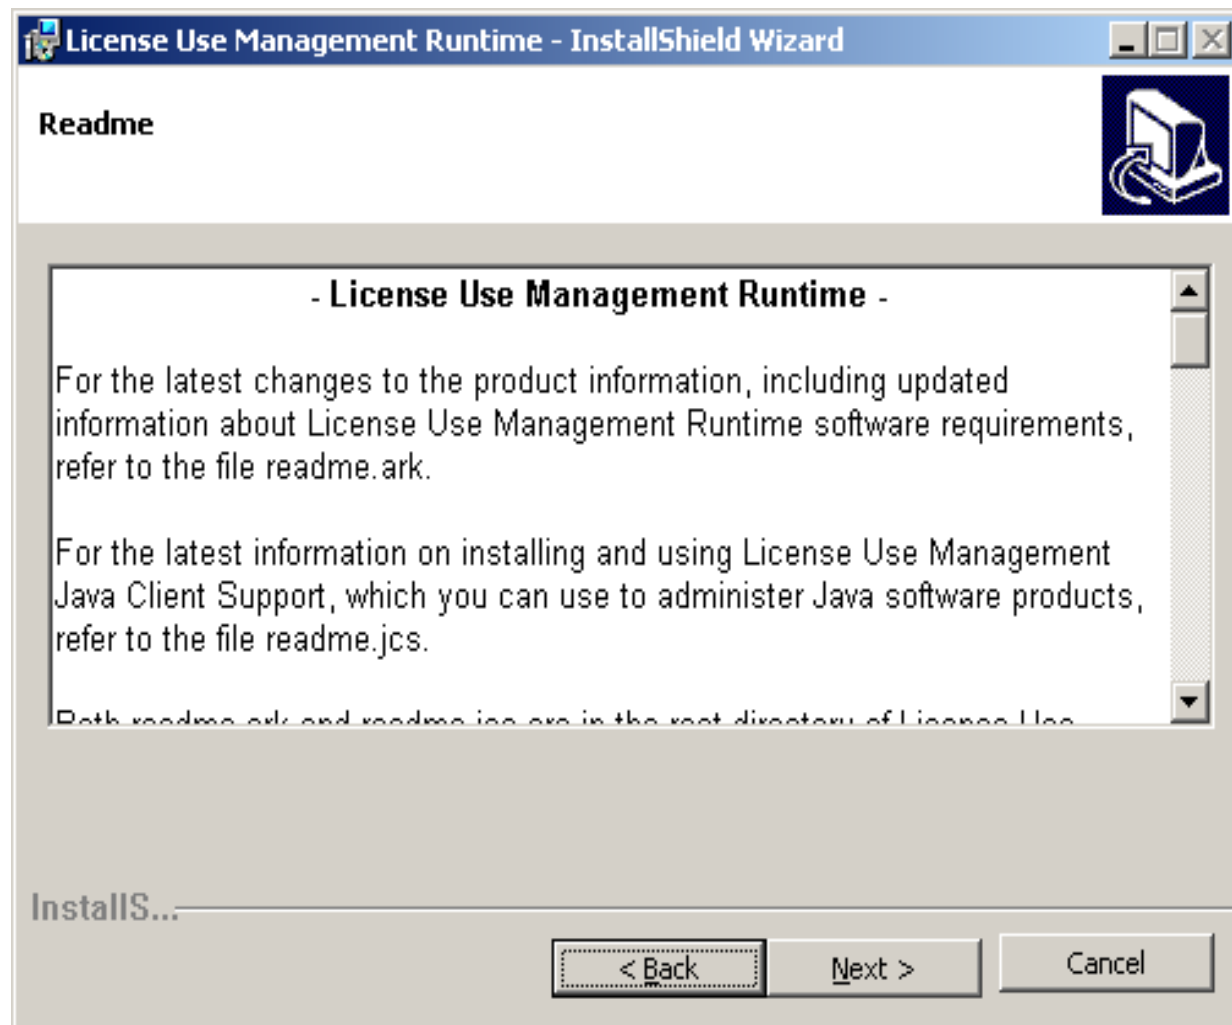

- 键入用户名
和公司名

License Use Management Runtime - InstallShield Wizard

Customer Information

Please enter your information.


User Name:

Organization:


InstallShield

< Back Next > Cancel


- 选择一个安装类型，一般选择完全安装（complete）
- 点击next进行安装并完成LUM的安装

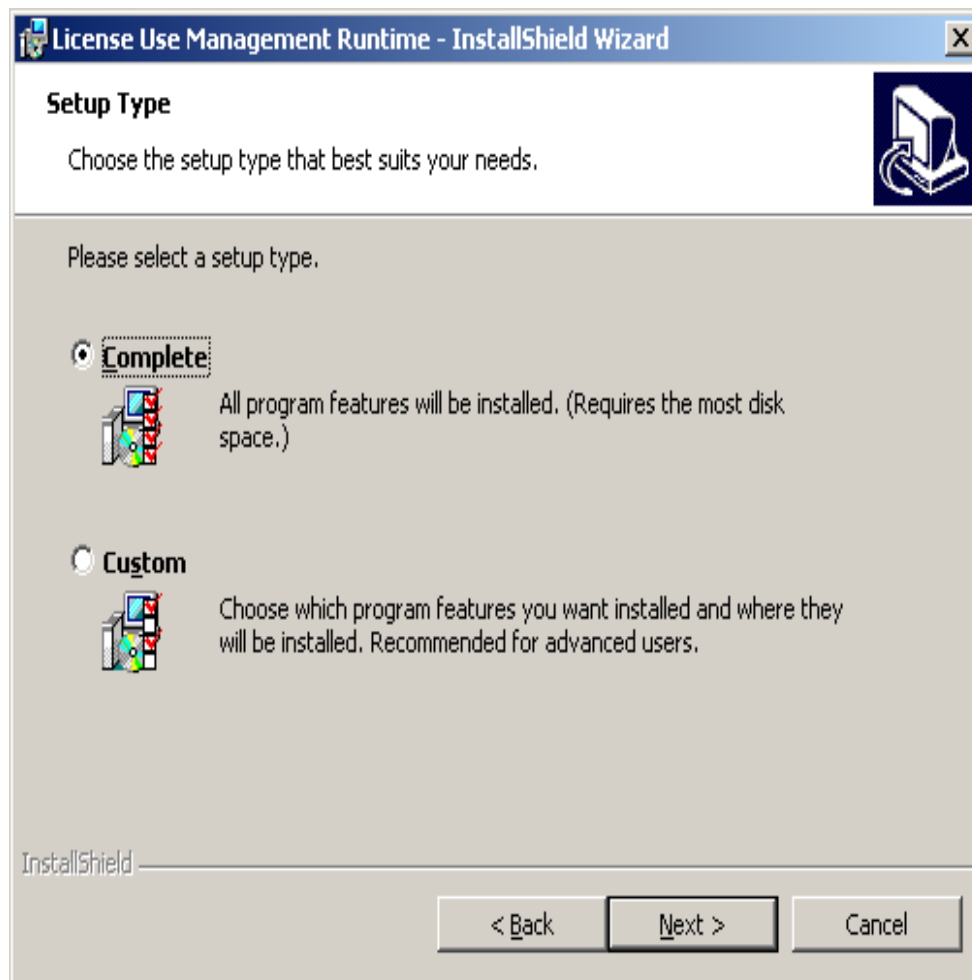


- 安装完毕后
将会在开始
程序目录中
出现
License Use
Runtime运
行程序

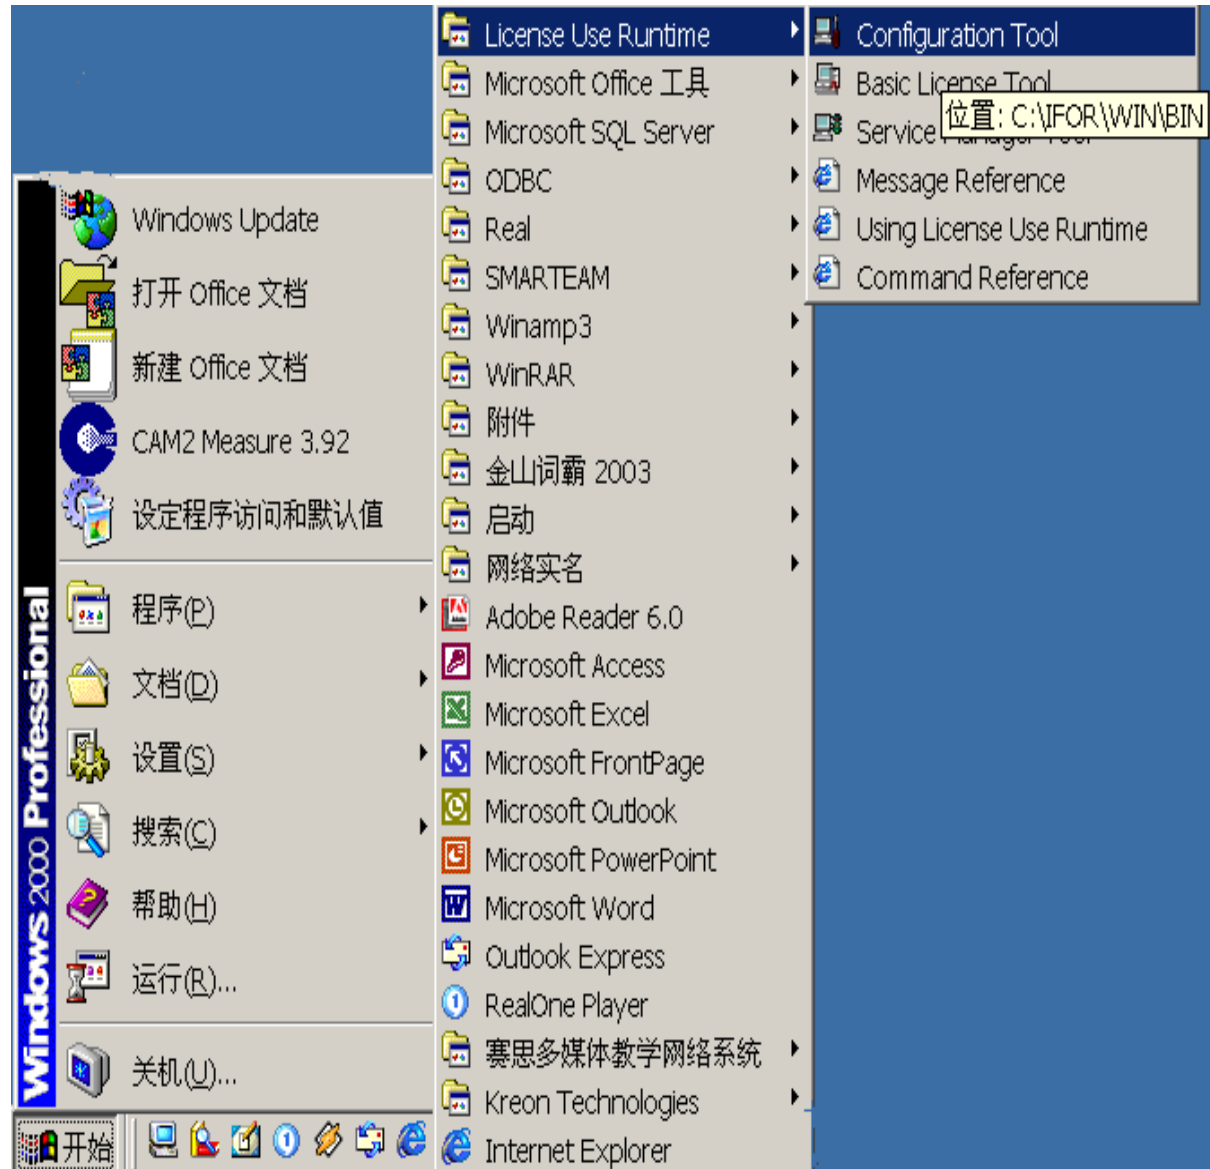


添加服务器地址

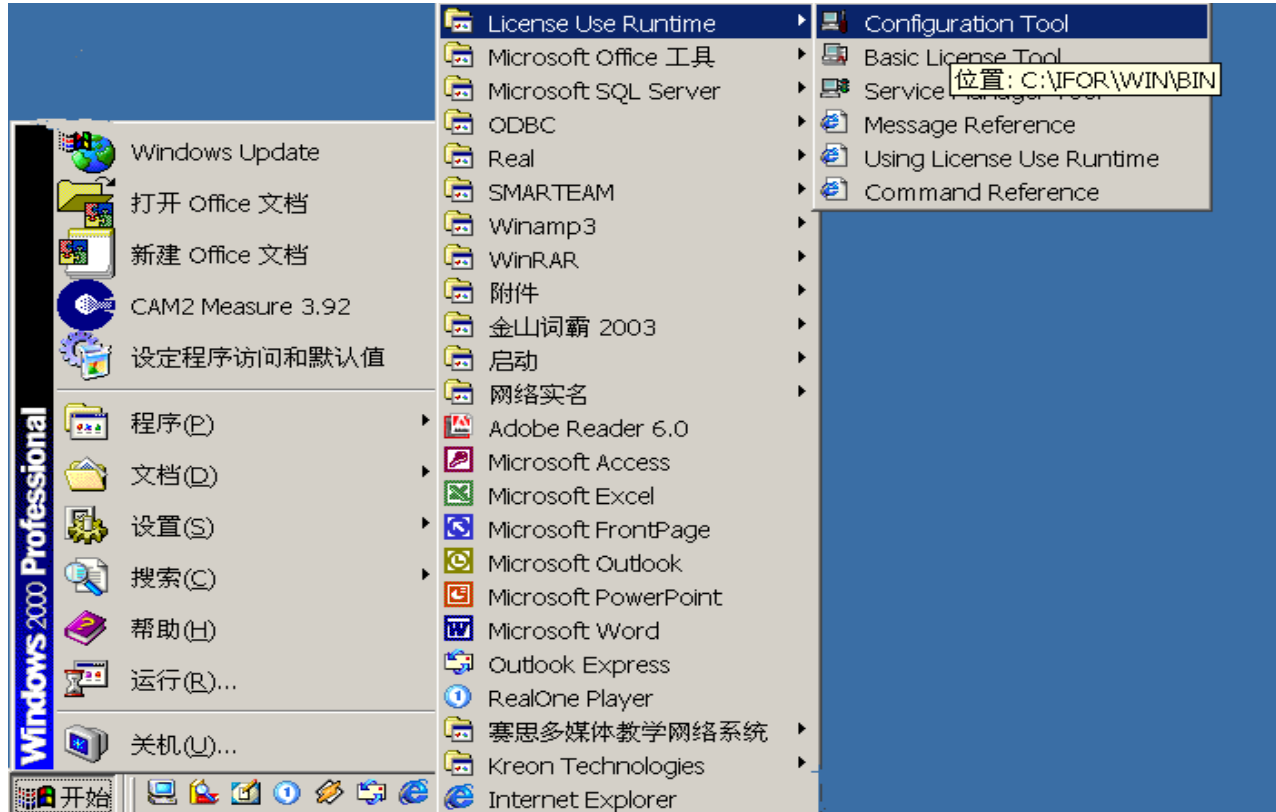


- 打开开始程序License Use Runtime下的 Configuration Tool选项

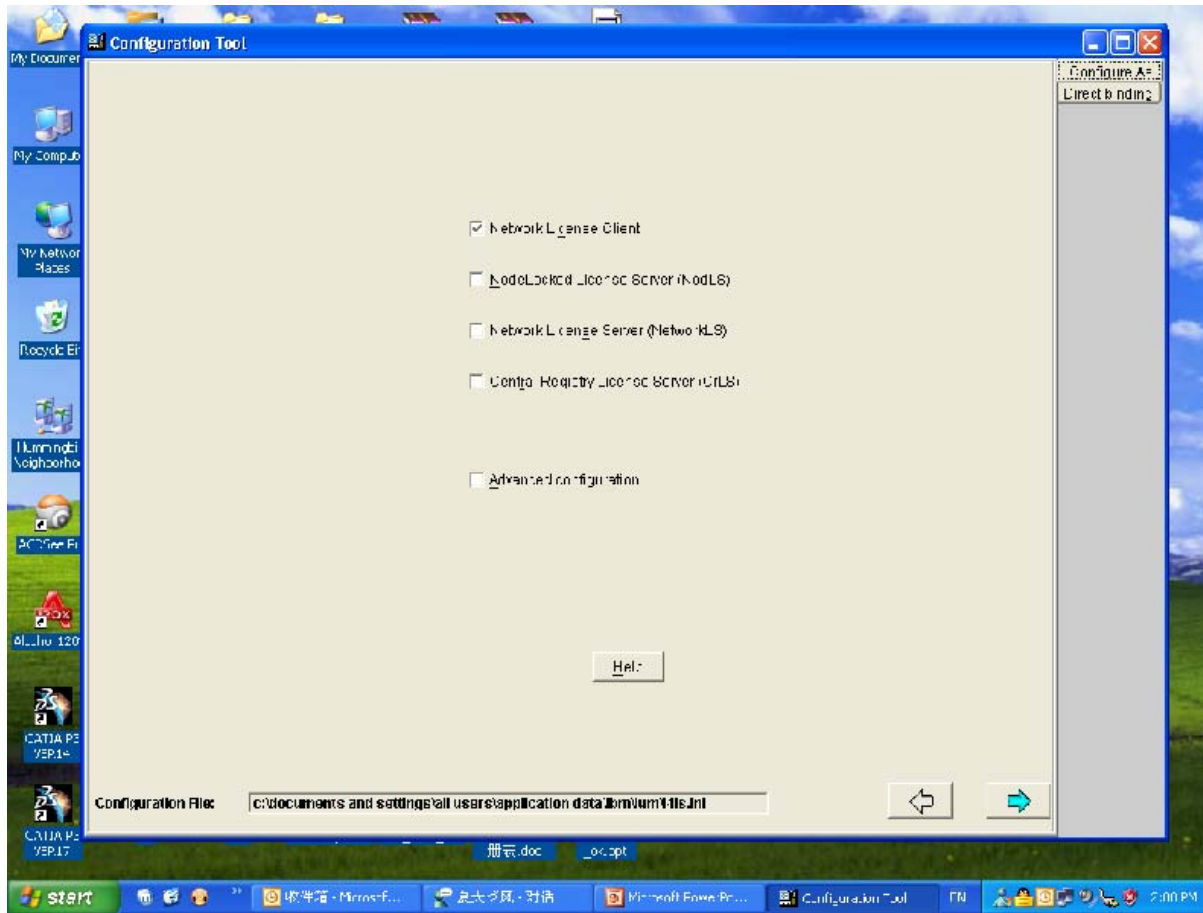

- 选中Network License client 选项，点击右下角黑色箭头进入下一步操作

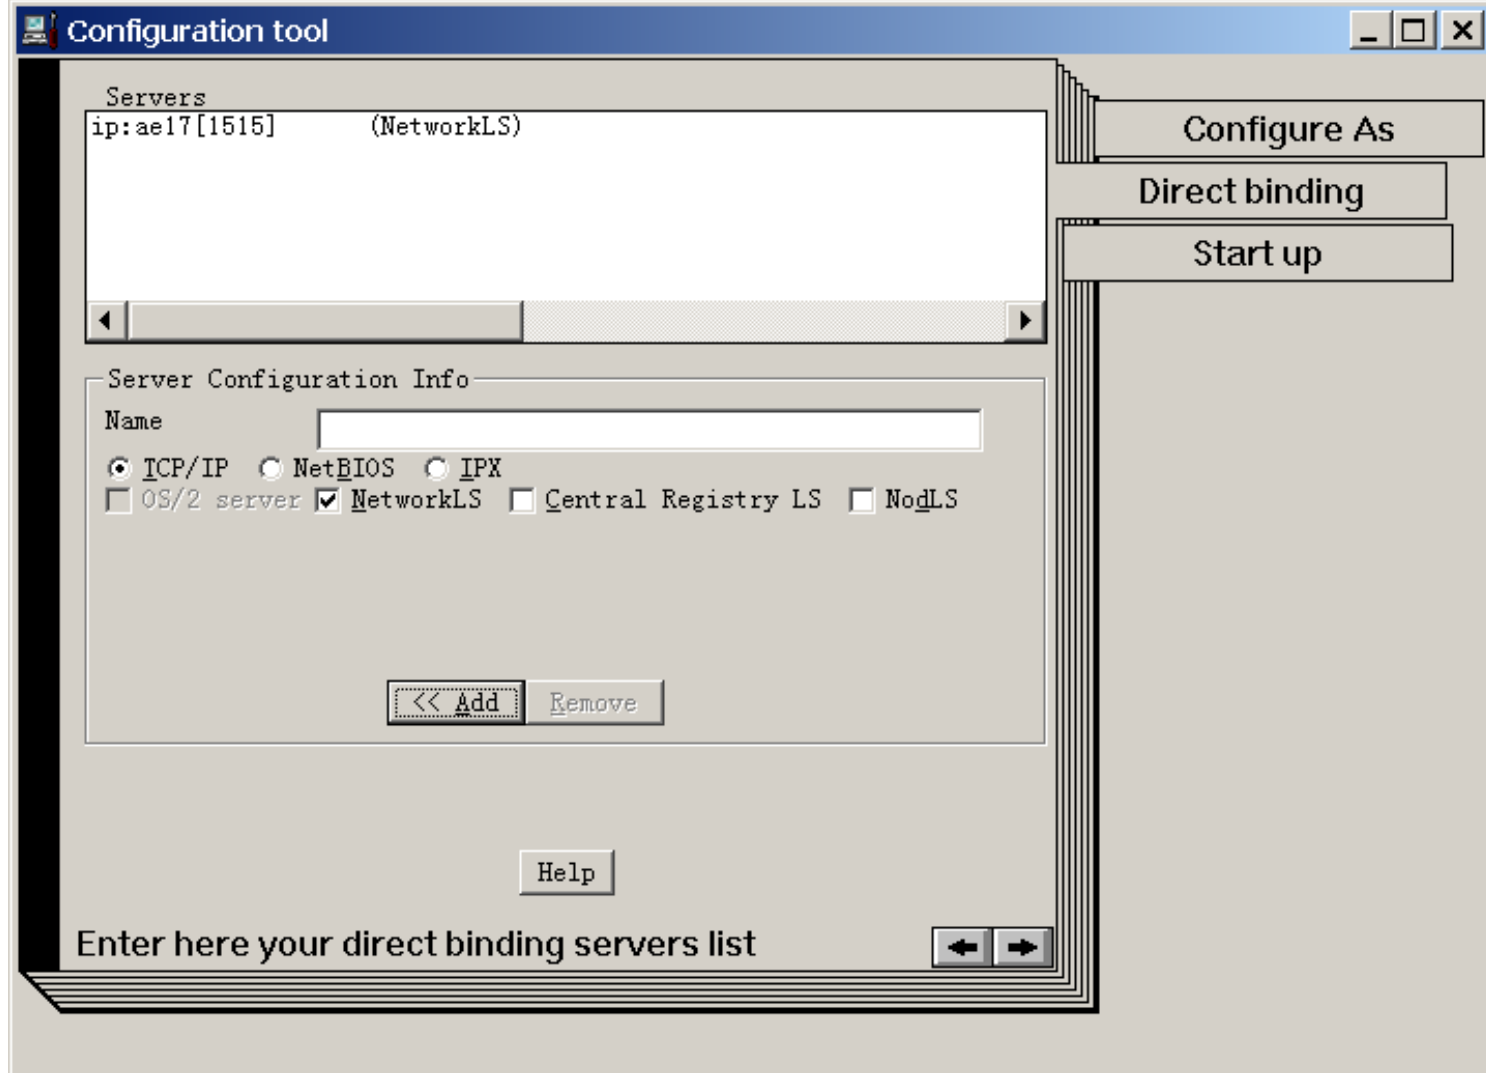

- 在Name栏中键入服务器的IP地址，如192.168.0.1,点击Add进行添加
- 选中TCP/IP以及NetworkLS选项，点击右下角黑色箭头进入下一步操作

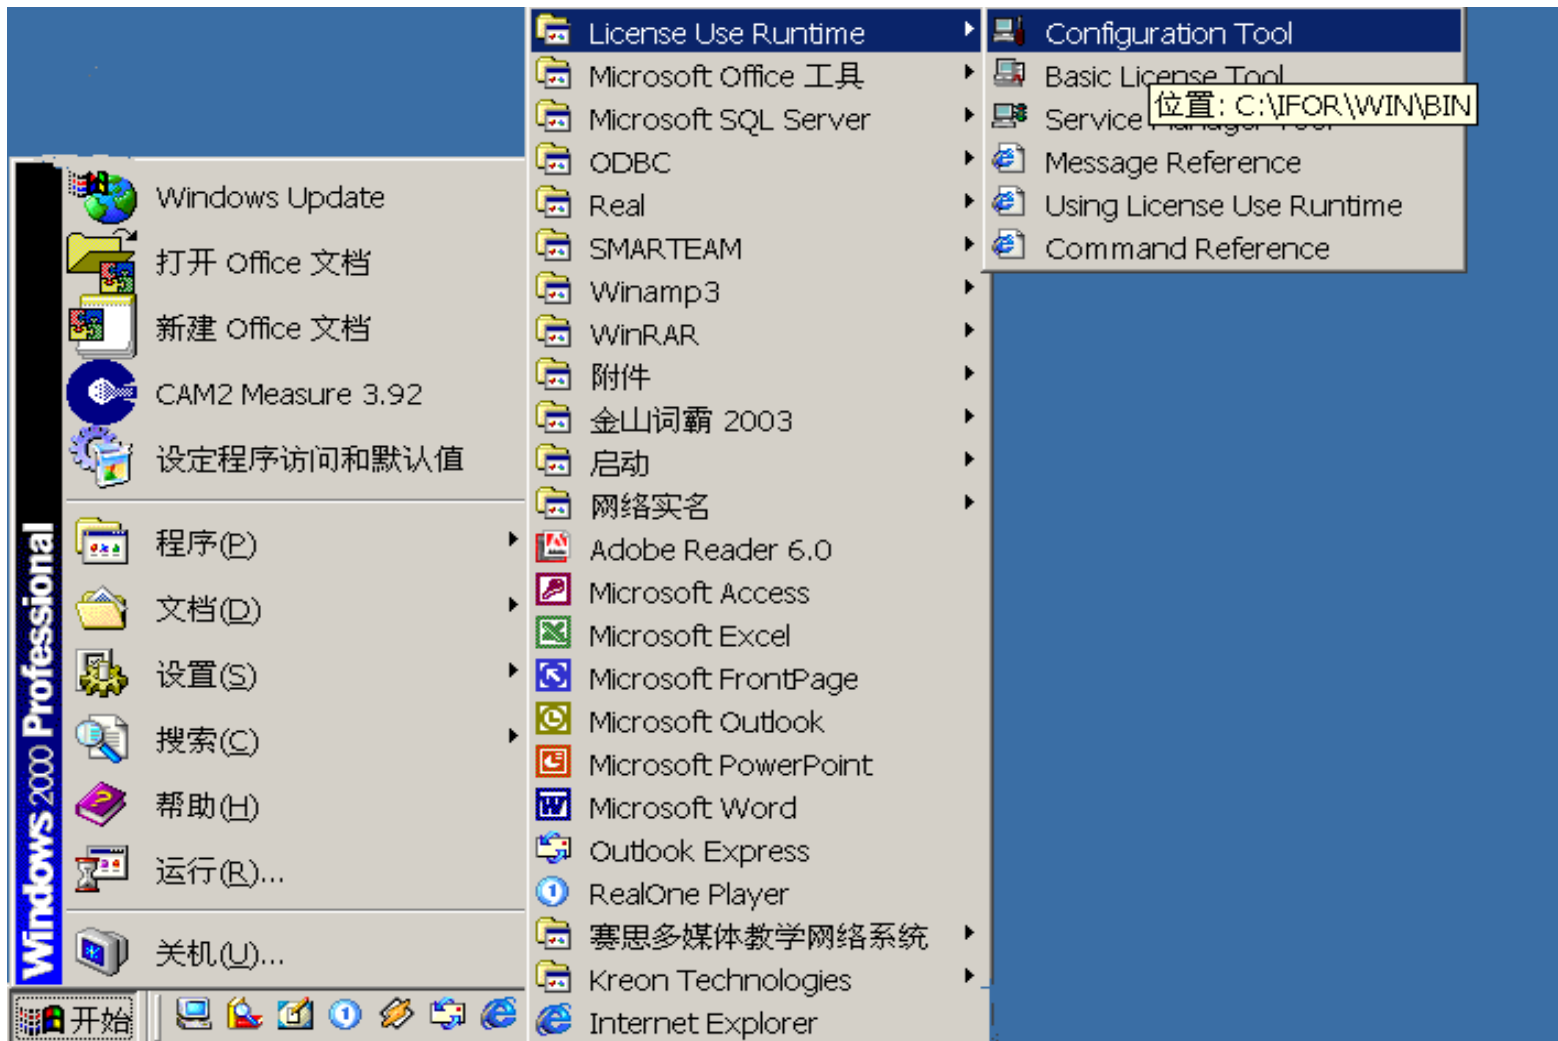

- 打开开始程序License Use Runtime下的Basic License Tool选项,检查license是否能够抓取

Basic License Tool

Products Selected Edit View Options Help

Local node: AE17 Products: 6

Product	Version	Vendor	Licenses	In Use License:
A3L-ENOVIA-All-in-one Demo Conf	R1	Dassault Systemes	2	
AC3-Catia-Automobile Class A 3C	TMPZ79B	Dassault Systemes	2	
AL2-Catia All-In-One Mrktg 2	R1	Dassault Systemes	5	3
CATIA Machinist V1R2	1.2	Dassault Systemes	2	
CDC-CAA C++ Development Conf	TMP179B	Dassault Systemes	2	
LicensePower/iFOR Test Product	1.0	LicensePower/iFOR Test Vendor	10000	

- 出现如上图所示对话框，license已抓取成功